



GAY GROUP OF COMPANIES

GAY COMPANY LIMITED
GAY CONTRACTING LIMITED

May 30, 2024

**1697 Hwy 2
Site Works Tender**

ADDENDUM NO 3

Tender Closing EXTENDED: June 4, 2024 at 11:00am


Question: Are you able to provide information for the SOG (and granular under)?
Answer: *Assume 200mm granulars and 100mm concrete*

Question: Is there also a detail for the concrete paving?
Answer: *A standard detail of concrete sidewalks can be followed.*



Item 3.1 ISSUED FOR PERMIT ONLY Structural drawings have been uploaded to the website tender page for review.

Item 3.2 Standard Concrete Detail attached

~ End of Document ~

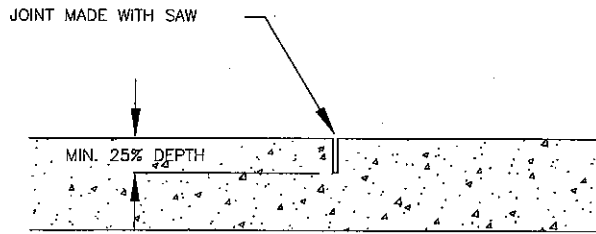

TYPICAL FLUSH CONTRACTION JOINT

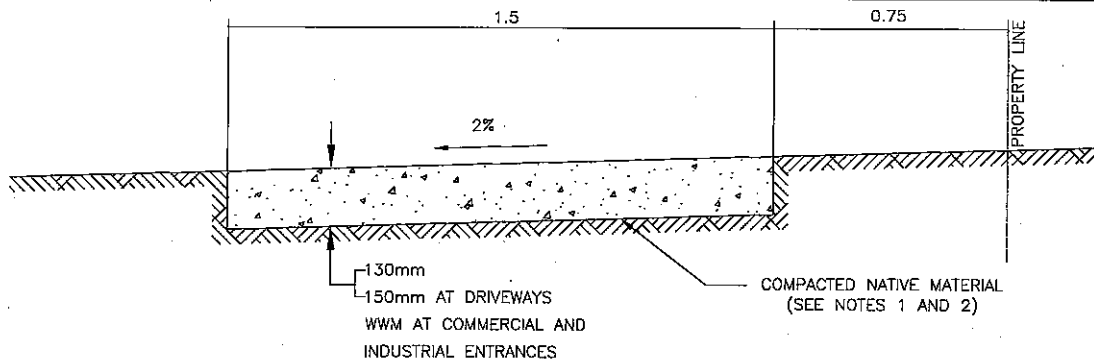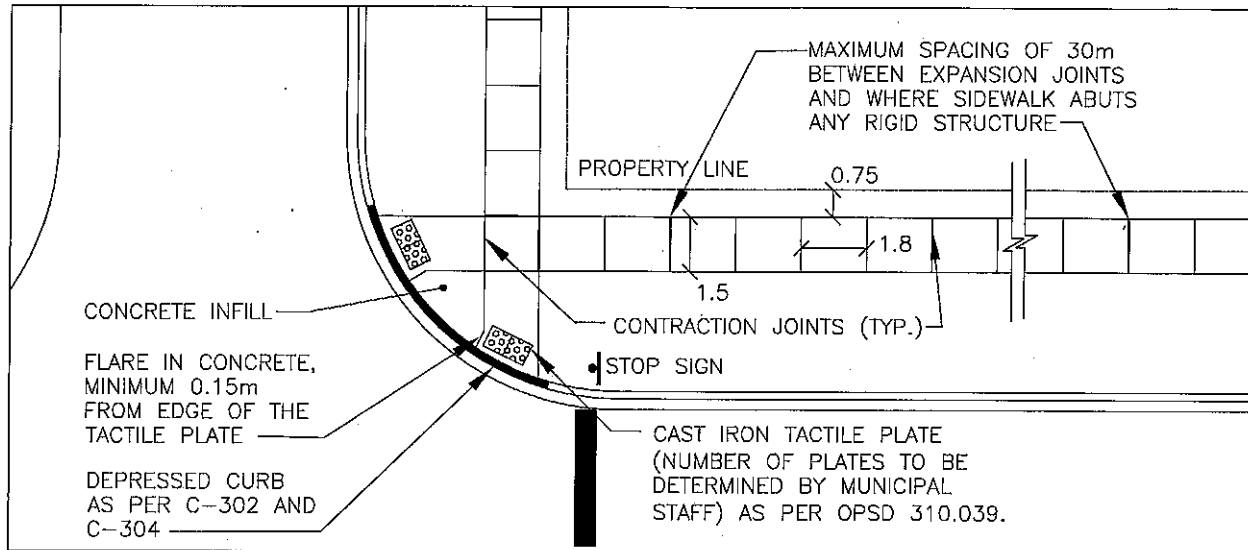

NOTES

- 1 Use 100mm compacted granular 'A' if native material is deemed unacceptable by the Municipality.
 - 2 Subgrade material to be well compacted, then dampened immediately prior to pouring sidewalk.
 - 3 Concrete shall conform to OPSS specifications (32MPa, 5.0% to 8.0% air).
 - 4 Curing compound to be applied within 1 hour of finishing.
 - 5 Expansion joints to be placed full depth of sidewalk.
 - 6 Contraction joints to be 25% of full depth of sidewalk.
 - 7 Surface of sidewalk to have an even, continuous broom finish with a tooled edge.
 - 8 Tactile plates to be installed at all intersection crossings and will follow the back of the curb at the discretion of the Municipality.
 - 9 If the distance between the inside edge of the curb depressions is 3.3 metres or greater, a 1.5 metre wide flared side ramp at 10:1 slope will be installed between depressions complete with 0.3 metre wide platform with full curb.
- All dimensions are in metres unless otherwise noted.

Municipality of Clarington

Engineering Services Department

CHECKED
[Signature]
APPROVED
[Signature]
APPROVED DATE
APRIL 2004

STANDARD CONCRETE SIDEWALK

REVISION NO. 4
APPROVED DATE: JAN. 2019

C-307